

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield IRD5

Customer:	Varied
Product Designation (OPN):	IRD5
Luminous Transmittance:	16%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
190-315 D LB8 + IR LB3	190-480 nm 6+
>315-480 D LB5 + IR LB6	800-1790 nm 5+
775-795 DIR LB4	820-950 nm 6+
>795-820 DIR LB5	>950-1400 nm 7+
>820-1400 D LB5 + IR LB6	>1400-1750 nm 6+
>1400-1880 DIR LB2	

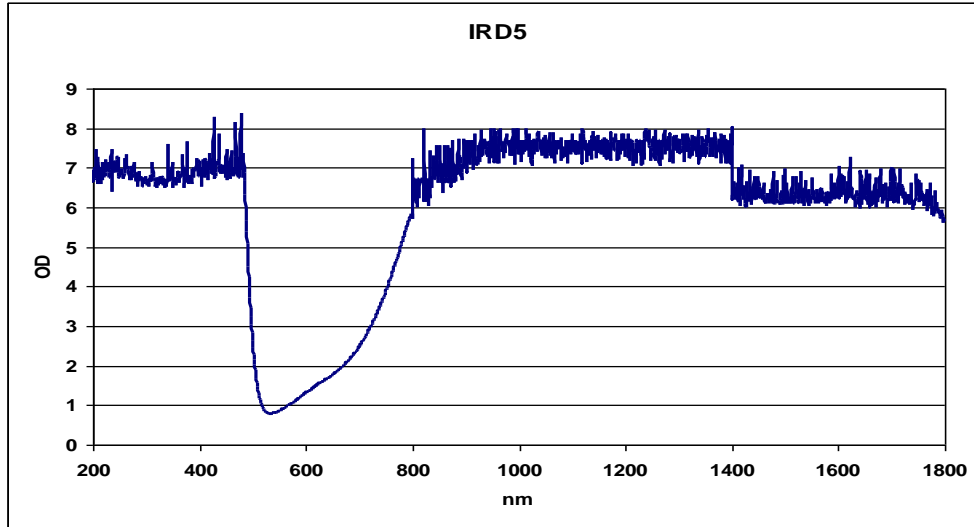


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.